

■ Model:TC275 Powered by CUMMINS

Output Rating

MODEL		Power rating		Voltage available
		PRIME(1)	STANDBY(2)	
C275D5	400V/50HZ PF:0.8	200KW 250KVA	220KW 275KVA	380/220V 400/230V 415/27V


General Information

Model		C275D5
Engine		6LTAA8.9G2
Speed control type		Electronical
Phase		3
Control System		Digital
System voltage		24V
Frequency		50HZ
Engine Speed(RPM)		1500
Fuel Consumption (L/hr)	Standby power(2)	58
	Prime Power(1)	53
	75% prime power	39
	50% prime power	27



Dimension and Weight

Dimension	Open	Silent
Length (L)	2600mm	3560mm
Width (W)	990mm	1220mm
Height (H)	1611mm	1935mm
Net Weight	1250KG	1780KG

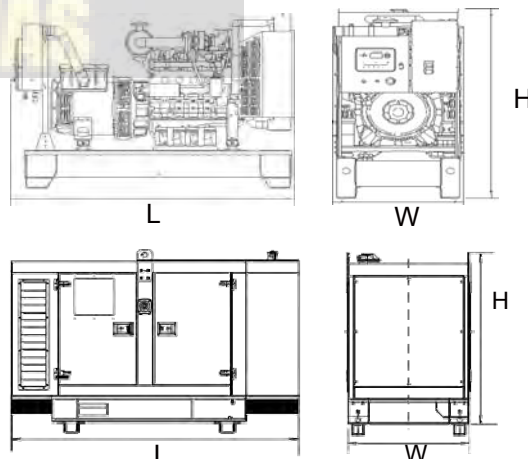

* 2006/42/EC Machinery safety.

* 2006/95/EC Low voltage

* EN 60204-1: 2006+A1:2009, EN ISO 12100:2010, EN ISO 13849-1: 2008, EN 12601: 2010

(1)Prime Power(PRP):

According to ISO 8528-1:2005, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operation conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24h of operation shall not exceed 70% of the PRP.

(2) Standby Power (ESP):

According to ISO 8528-1:2005, standby power is the maximum power available during a variable electrical power sequence, under the stated operation conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24h of operation shall not exceed 70% of the ESP.

▪Engine Specification

Compression Ratio:	16.6:1	Aspiration:	Turbocharged and Charge Air Cooled
Bore:	114 mm	Displacement:	8.9 L
Stroke:	145 mm	No. of Cylinders:	6
Emission Certification:	MEP STAGE II	Fuel System:	FR92516: BYC P7100/GAC
Governor Regulation:	≤3%		FR92996: BYC P7100/SEGMA

ENGINE MOUNTING

Maximum (Static) Bending Moment at Rear Face of Block.....	-N.m	1356
--	------	------

EXHAUST SYSTEM

Maximum Back Pressure.....	-kPa	10
----------------------------	------	----

AIR INTAKE SYSTEM

Maximum Intake Air Restriction with Heavy Duty Air Cleaner		
— Dirty Element.....	-kPa	6
— Clean Element.....	-kPa	4

CHARGE AIR COOLING SYSTEM

Maximum Temp. Rise Between Engine Air Intake and Intake Manifold	-°C	25
Maximum Air Pressure Drop from Turbo Air outlet to Intake Manifold		
— 1500RPM.....	-kPa	8.5
— 1800RPM.....	-kPa	13.5
Maximum Intake Manifold Temperature Differential (Ambient to IMT) (IMTD).....	-°C	50
Maximum Intake Manifold Temperature for engine protection (Warning Threshold).....	-°C	93

LUBRICATION SYSTEM

Minimum Engine Oil Pressure for Engine Protection Devices:		
— Idle Speed.....	-kPa	103
— Governed Speed.....	-kPa	276-414
Maximum Oil Temperature.....	-°C	121
Minimum Required Lube System Capacity - Sump plus Filters.....	-litre	27.6

FUEL SYSTEM

Type Injection System.....	BYC P7100 Direct Injection	
Maximum Restriction at Lift Pump.....	-kPa	20.3
Maximum Fuel Flow on the Supply Side of the Fuel Pump.....	-litre/hr	83
Maximum Fuel Inlet Temperature.....	-°C	70
Total Drain Flow (constant for all loads).....	-litre/hr	30

COOLING SYSTEM

Coolant Capacity - Engine Only.....	-litre	11.1
Maximum Coolant Friction Head External to Engine...-1800 rpm.....	-kPa	35
—1500 rpm.....	-kPa	28
Maximum Static Head of Coolant Above Engine Crank Centerline.....	-m	18.3
Standard Thermostat (Modulating) Range.....	-°C	82 - 93
Minimum Pressure Cap.....	-kPa	103
Maximum Top Tank Temperature for Standby / Prime Power.....	-°C	110 / 104

■ Alternator

Alternator		
Poles	Num	4
Winding Connections (standard)		Star-serie
Insulation	Class	H class
Enclosure (according IEC-34-5)		IP23
Exciter System		Brushless
Voltage Regulator		A.V.R. (Electronic)
Bearing		Single bearing
Coupling		Flexible disc
Coating type		Standard (Vacuum impregnation)

Control Panel: AMF20



Benefits

- Less wiring and components
- Integrated solution
- Less engineering and programming
- Perfect price/performance ratio

Features

- Mains measurements (50/60 Hz):
U1-U3, Hz
- Generator measurements (50/60 Hz):
U1-U3, I1-I3, Hz, kW, kVA, kWh
- Selectable protections alarm/shutdown
- 3 phase Generator protections
 - Over-/under voltage
 - Over-/under frequency
 - Current/voltage asymmetry
 - Overcurrent/overload
- 3 phase AMF function
 - Over-/under frequency
 - Over-/under voltage
 - Voltage asymmetry
- Configurable analog inputs
- Battery voltage, engine speed (pick-up) measurement
- Configurable programmable binary inputs and outputs
- Warm-up and cooling functions
- Parameters adjustable via keyboard or PC
- Generator C.B. and Mains C.B. control with feedback and return timer
- RS232 interface (AT-LINK CONV cable is necessary for IL-AMF 20)
- Modem communication support (IL-AMF 25 only)
- Dimensions 180x120 mm (front panel)
- Sealed to IP65

www.chl.cl

Av. Irarrazaval 2401, Of. 912 Edificio Global Center,
Ñuñoa, Santiago- Chile
Tel 56 23245 0110/ 23245 0244